


Applications

Meters, Trucks, Textile, Oil Tankers

GP130



GP130-XL

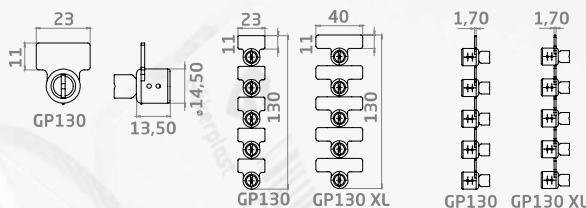

Product Description

- Made of Polycarbonate (PC) Ultra-Violet resistant body and Polyacethale (POM) colored insert
- This product is also available in black PP material (GP130-PP), which is resistant to oil/petroleum. MOQ is 20.000pcs.
- Heat staking technology is used to fix the insert
- Stainless steel Ø0,66mm, Galvanised Steel Ø0,66mm and PVC coated Steel Ø0,90mm sealing wire options

- Requested length of sealing wire can be attached to the Twistseal body
- Laser marking company name and serial number
- Barcode option for mobile applications (Code128, Int 2/5, etc.)
- Complies with RoHS (Restriction of Hazardous Substances) Directive 2002/95/EC and its subsequent amendments
- Shipped in mats of 5 pieces
- Pull-apart strength: 40 Kgf
- Working temperature: -40°C / +120

Color Options

Please contact our sales team for different colors



Product Description	GP130 with 20 cm wire
Quantity	1.000 pcs
Box Dimensions	24x30x34 cm
Box Weight	3,44 kg
Pallet Info	92x123x220 cm, 90.000 pcs